



DES-4421^{Q&As}

Specialist - Implementation Engineer, PowerEdge MX Modular Exam

Pass EMC DES-4421 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/des-4421.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

What can be used as the firmware update source for OME-M within an MX chassis?

- A. Server Update Utility Baseline from a Catalog
- B. Server Update Utility System Live Image (SLI)
- C. Dell Update package System Live Image (SLI)
- D. Dell Update Package Baseline from a Catalog

Correct Answer: D

Reference: https://topics-cdn.dell.com/pdf/openmanage-enterprise-modular-v10001-powerededge-mx7000_users-guide4_en-us.pdf

QUESTION 2

A server sled has a single mezzanine card installed in the correctly supported slot. To which IOM fabric(s) does the sled have access?

- A. Fabric A1 and Fabric A2
- B. Fabric A1 only
- C. Either Fabric A or Fabric B, depending on the configuration set in OME-M
- D. Fabric A1 and Fabric B1

Correct Answer: B

Reference: https://i.dell.com/sites/csdocuments/Product_Docs/en/dell_emc_poweredge_mx7000_technical_guide.pdf

QUESTION 3

What is a characteristic of MX7000 networking in Full Switch Mode?

- A. Layer 2 bridging is disabled by default and interfaces must join a bridge domain (VLAN) before being able to forward frames.
- B. Networking is enabled by default and all switch-specific OS10EE capabilities are available.
- C. Networking is available on MX9116n FSE and MX7116n FEM but not on the MX5108n.
- D. Switches operate as layer 2 I/O aggregation devices and are managed through OME-M.

Correct Answer: B


Reference: <https://infohub.delltechnologies.com/l/test2-powerededge-mx-networking-architecture-guide-1/operating-modes-description-7>



QUESTION 4

DRAG DROP

Match the M840c components to the callouts shown in the exhibit.

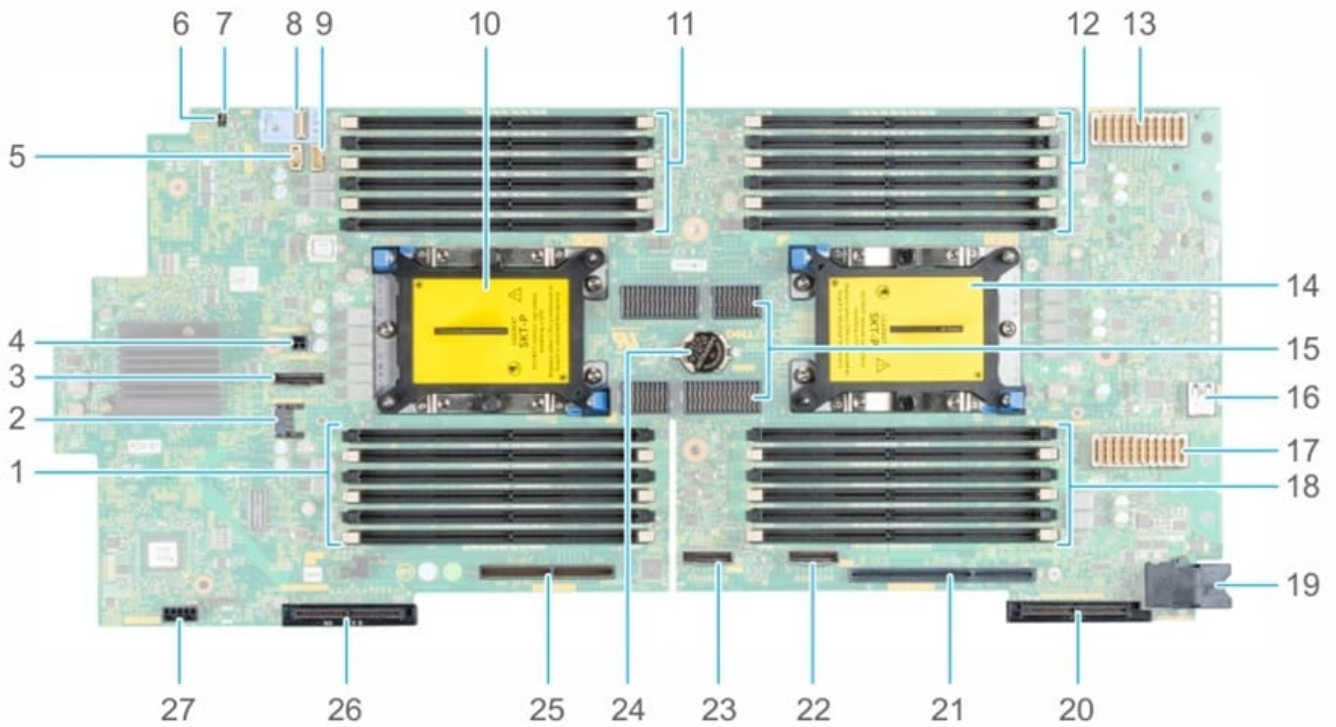

Select and Place:

<u>Component:</u>	<u>Callout:</u>
Mini Mezzanine card connector	25
IDSDM/BOSS connector	26
PERC card connector	23
PEM Connector	20

Correct Answer:



Component:

Callout:

	IDSDM/BOSS connector
	PERC card connector
	PEM Connector
	Mini Mezzanine card connector

QUESTION 5

The MDB chassis tub assembly vertical distribution board provides connectivity to which chassis components?

- A. Five near fan modules
- B. Four cooling fans and four fabric I/O modules
- C. Power supplies, compute sleds, Management Modules, and two fabric I/O modules
- D. Pear power supplies, compute sleds, Management Modules, and all fabric I/O modules

Correct Answer: B

Reference: https://i.dell.com/sites/csdocuments/Product_Docs/en/dell_emc_poweredge_mx7000_technical_guide.pdf

[Latest DES-4421 Dumps](#)

[DES-4421 Practice Test](#)

[DES-4421 Study Guide](#)